

MOTOBATT

QuadFlex™ Battery
 WWW.MOTOBATT.COM
 MBT6N4



Features

- Patented Quad Terminal Design - Reduce carrying costs
- 6V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

Performance Specifications

Nominal Voltage ----- 6 volts (3 cells)

Nominal Capacity

20-hr. (0.2A to 10.50 volts)-----	4.2AH
10-hr. (0.4A to 10.50 volts)-----	4.0 AH
5-hr. (0.8A to 10.20 volts)-----	3.4 AH
1C. (4.0A to 9.6 volts)-----	3.8 Min (2.5AH)
8C. (32.0A to 6.00 volts)-----	3Min (1.60AH)

Approximate Weight ----- 1.61 lbs. (0.73kg)

Energy Density (20-hr. rate) ----- 2.59W-h/in³ (159.6 W-h/l)

Specific Energy (20-hr. rate) ----- 31.3W-h/lb (69.0 W-h/kg)

Internal Resistance (approx) ----- 20 milliohms

Shelf Life (% of nominal capacity at 68°F (20°C)----- SOC% OCV

1 Months -----	97%	12.78V
3 Months -----	91%	12.7V
6 Months -----	83%	12.5V


Operating Temperature Range

Charge -----	-4°F (-20°C) to 122°F (50°C)
Discharge -----	-40°F (-40°C) to 140°F (60°C)

Case ----- ABS

Carton Contents ----- 1-MotoBatt MBT6N4 Battery

Physical Dimensions: (in./mm)

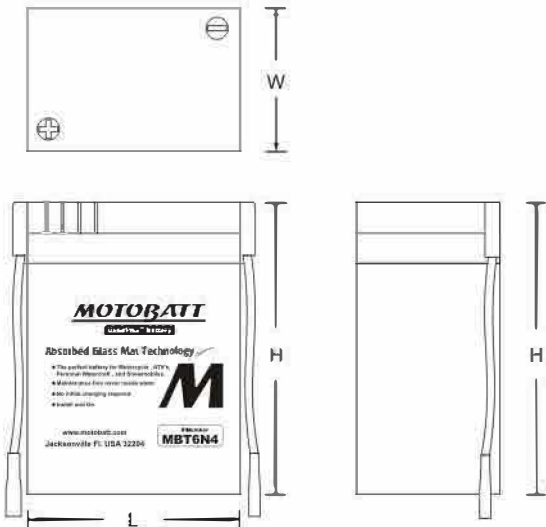


L: 2.76(70) W: 1.85(47) H: 3.80(96)

Tolerances are +0.04in. (+1mm) and +/-0.08in. (+/-2mm) for height dimensions.




RETAIL CARTON


Shelf life & Storage

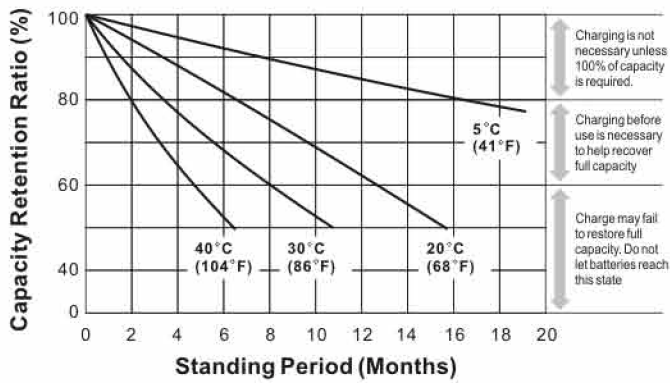


Discharge Characteristics

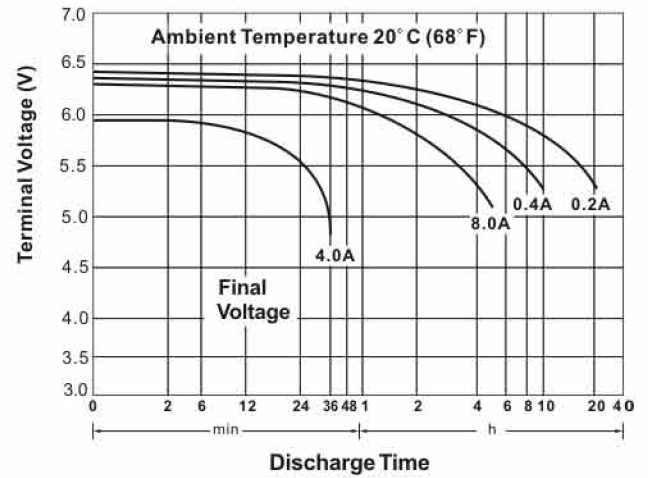

Discharge Time vs. Discharge Current

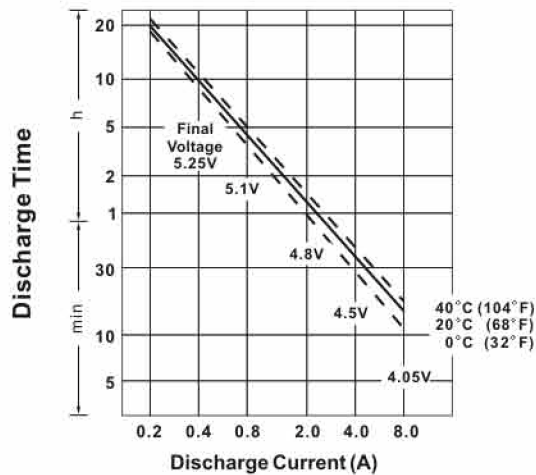

Life Characteristics in Cyclic Use

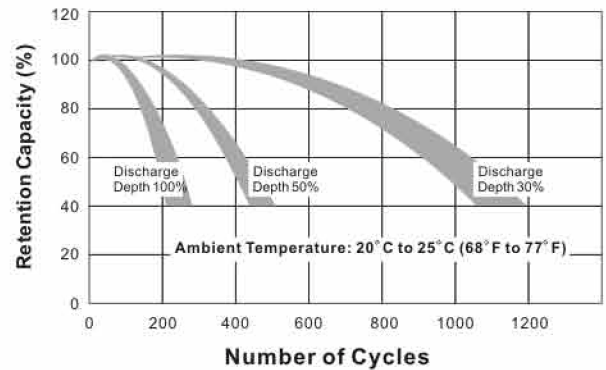

Charging

Cycle Applications: limit initial current to 1.2A. Charge until battery voltage (under charge) reaches 7.4 to 7.5 volts at 68°F(20°C). Hold at 7.4 to 7.5 volts until current drops to under 72mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 750mA(6V). Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at www.motobatt.com

Can be used to replace

6N42A	6N42A3	6N42A4	6N42A5
6N42A6	6N42A8	6N4C1B	

Further Information

Please refer to our website www.motobatt.com to locate a distributor in your area.